
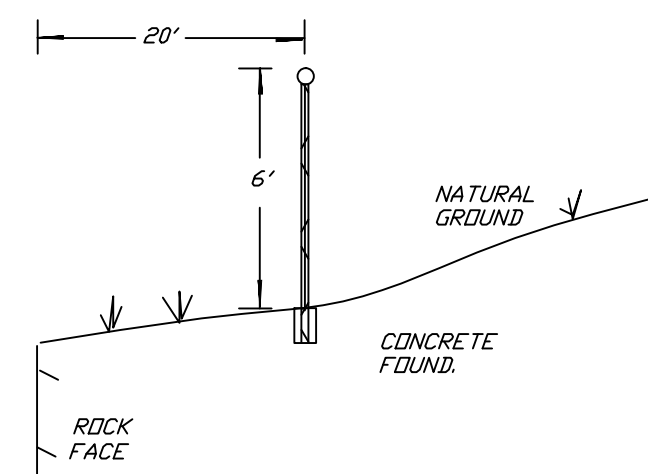


RIP RAP GRADATION: STONE SIZE D50 = 6"	
% FINER BY WEIGHT	
2"	0-15%
4"	20-35%
6"	35-50%
8"	50-65%
10"	60-80%
12"	75-100%

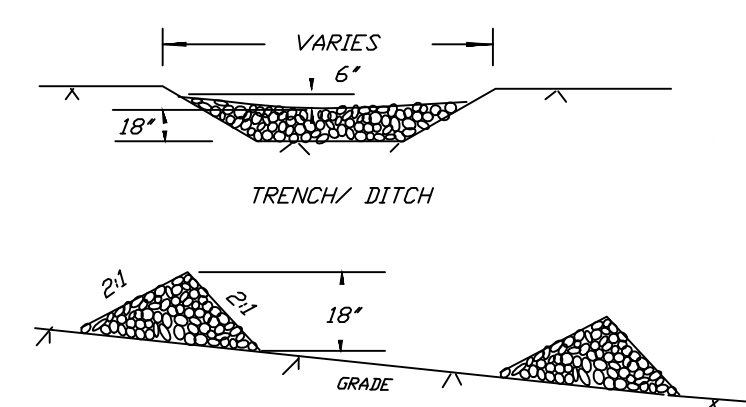

A minimum of 1.5 tons/acre of mulch shall be applied.

All erosion controls shall be inspected weekly AND after every half-inch of rainfall.

*Dust Control:*  
*Pit operator is to implement dust control measures as needed to prevent airborne dust particles from leaving the site.*














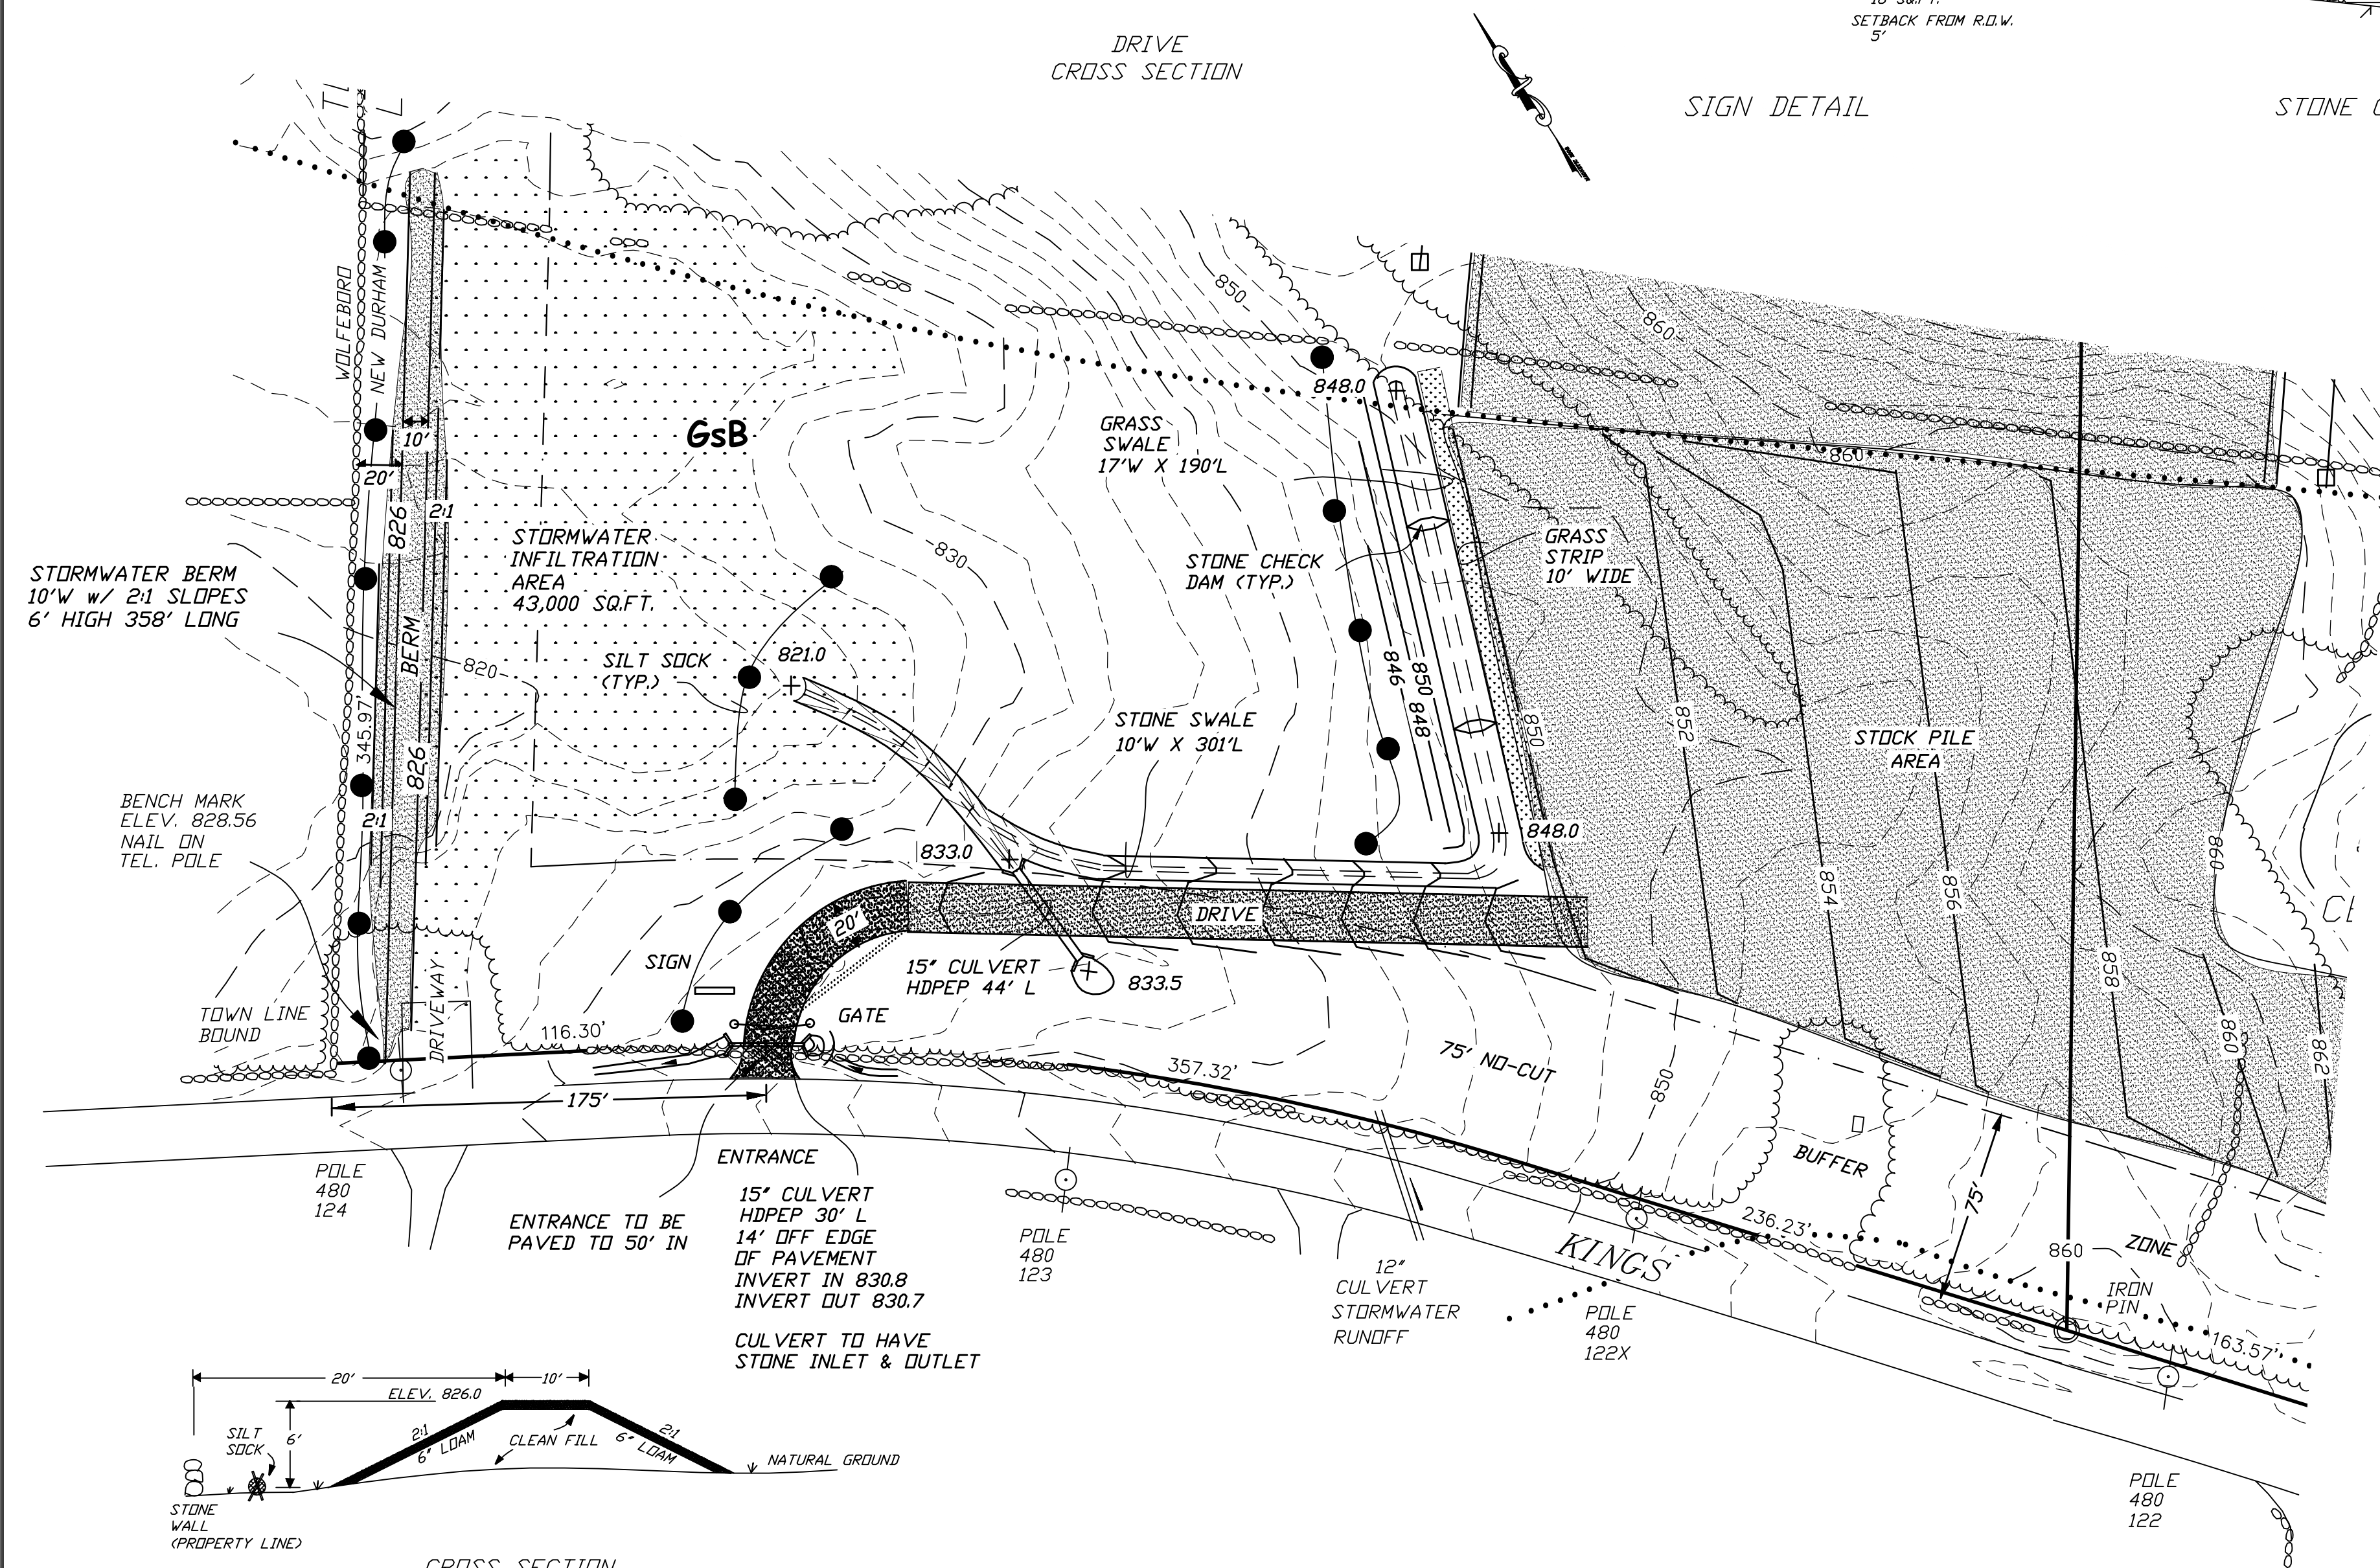


**VARNNEY**  
ENGINEERING, LLC  
93 POWDER MILL RD  
ALTON, NH 03809  
twarnney@worldpath.net  
603-877-7171

REVISION	DATE
<p><i>EXCAVATION PLAN</i></p> <p>LAND OF</p> <p><i>GREEN OAK REALTY DEVELOPMENT, LLC</i></p> <p><i>DETAILS, EROSION CONTROL</i></p> <p>TAX MAP 206 LOTS 10 &amp; 11</p> <p>KINGS HIGHWAY</p>	

NEW DURHAM NH

SHEET 3 of 5      SEPTEMBER 20, 2016



	UTILITY POLE
	CULVERT
	TREE LINE
	EXCAVATION SETBACK LINE
	SOIL LINE
	PROPERTY LINE
	SOIL TYPE
	CONTOUR LINE
	IRON PIN FOUND
	DRILL HOLE
	TEST PIT
	FENCE
	SILT SOCK

SCALE 1"=50'